


ELECTRIC WINCH SERIE
PHH2-PHH30

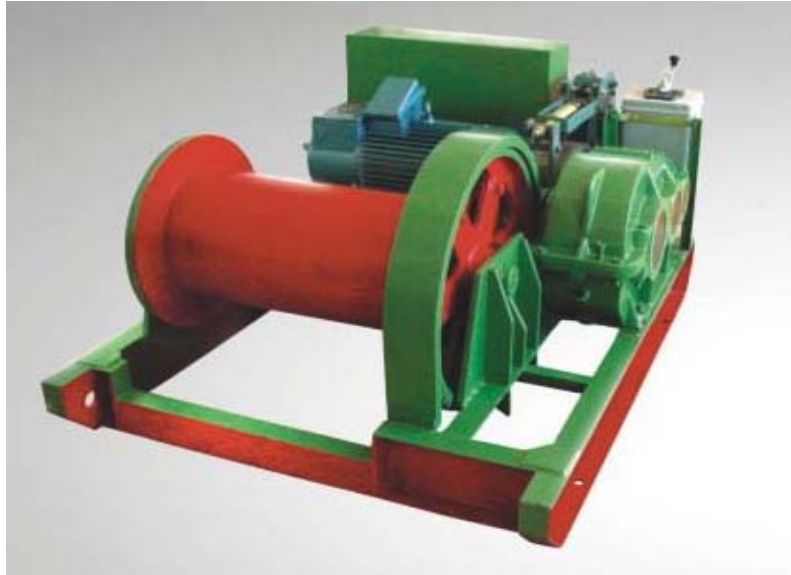

THE ELECTRIC WINCH SERIES CAN BE MAINLY USED IN LIFTING, DISASSEMBLE, MOVING AND INSTALLING POINTS IN CONSTRUCTION COMPANIES, DIGGINGS AND WORKSHOP.
MAIN CONSTRUCTION FEATURES: WITH STRONG PULLING POWER, STEEL CABLE ARRANGE IN AN ORDERLY WAY, WITH SAFETY AND RELIABLE.

TECHNIQUE PARAMETERS

Model	Cable pull (KG.)	Cable speed (m/min)	Wire rope (mm)	Reduction box		Drum (mm)	
				Type	Transmission ratio	diameter	length
PHH2	2000	12	15.5	JZQ350	23.34	260	480
PHH3	3000	10	17	JZQ350	31.5	310	510
PHH5	5000	10	21.5	JZQ400	23.34	400	730
PHH8	8000	10	26	JZQ500	31.5	500	900
PHH10	10000	9	30	JZQ650	40.17	550	1000
PHH12	12000	9	32	JZQ650	40.17	650	1000
PHH16	16000	6.6	36.5	JZQ750	31.5	750	130
PHH20	20000	7.7	39	JZQ750	31.5	750	1830
PHH25	25000	8.5	42	JZQ750	31.5	850	1925
PHH30	30000	8.5	48	JZQ850	23.34	960	1960

Model	Capacity	Drum (mm)			Arrester	Size (cm)	Weight (ks)
		Type	Power (kw)	Rotate speed (r/min)			
PHH2-150	150	Y160M-6	7.5	970	TJ2--200	116X100X60	630
PHH3-180	180	Y160M-6	7.5	970	TJ2-200	138X106X65	680
	180	YZR180L-8	11	685	TJ2-300	185X135X90	1400
PHH8	300	YZR225M-8	22	715	YWZ-300	205X275X105	3000
PHH10	450	YZR250M1-8	30	720	YWZ-300	220X180X110	4000
PHH12	500	YZR250M2-8	37	725	YWZ-300	250X190X120	5500
PHH16	1000	Y2ZR280S-8	45	717	YWZ-400	390X300X245	7500
PHH20	600	YZR250M2-6	45	965	YWZ-400	400X300X200	8500
PHH25	700	YZR280S-6	55	969	YWZ-400	412X300X200	9500
PHH30	650	YZR280M-6	75	969	YWZ-400	450X300X250	11000

Distribuido por: **Equipos de Elevación, S. A. DE C. V.**

TECOCO NO. 35 COL. LA LOMA TLANEPANTLA EDO. DE MÉXICO C. P. 54070
 TEL: 5365 5115 * 5365 513 * 5220 8640 * 5240 7666
 E-MAIL: equiposdeelevacion@prodigy.net.mx / www.equiposdeelevacion.com